




DuraSpec Neopor Siding Insulation

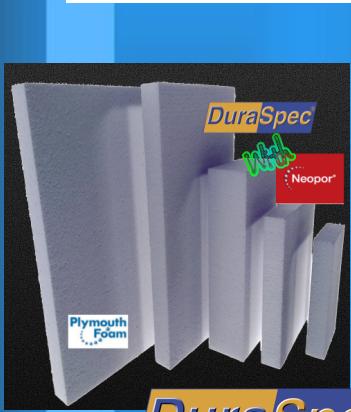

DuraSpec Neopor Siding Insulation is a closed cell EPS that meets or exceeds ASTM C578. With high retained R-value, this product provides great compressive strength (PSI), increase thermal efficiency and reduces energy costs.

Dura Spec Expanded Neopor Polystyrene (EPS) Siding Insulation is compatible with all types of siding - wood, aluminum, steel, fiber cement and vinyl.

- **Retains R-value**
- **Low water absorption**
- **Cost effective**
- **Easy to handle, install and cut**
- **Environmentally friendly containing no CFCs or HCFCs**

DuraSpec Neopor EPS Properties

Thickness	R-Value @ 23° F	R-Value @ 75° F	PSI CR @ 10%
3"	15.03	13.44	13.0
2"	10.02	8.96	13.0
1.5"	7.52	6.72	13.0
1"	5.01	4.48	13.0
.75"	3.78	3.36	13.0
.5"	2.51	2.24	13.0

Availability

4' x 4', 4' x 8' and 4' x 16'
custom sizes available

Plymouth Foam
1800 Sunset Dr.
Plymouth, WI 53073

920-889-0021
800-669-1176

Contact

John Calkins 920-889-0021 jcedisonassc@yahoo.com

This brochure is printed by JC Edison & Associates for promotional use only.

*Check Plymouth Foam's website for additional information.